

WETTY

OUTDOOR INSTALLATION

BACKLIGHT



BACKLIGHT
Designed and Made in Italy

One fusion of Technique and Design for one perfect lighting.

Designed and produced in Italy since 1998 and exported to more than 100 countries worldwide.

Index

04 | What is WETTY

05 | Technical specs

06-09 | Wetty sections 76.2 mm | 3.0 inches

10-13 | Wetty sections 101.6 mm | 4.0 inches

14-17 | Wetty sections 152.4 mm | 6.0 inches

18-27 | Gallery

What is **WETTY**

The architecture of light.

Welcome to the innovative world of **Wetty**, the product that redefines your outdoor and humid lighting experience. **Wetty** has been specifically designed to withstand the elements, allowing you to enjoy the beauty of lighting even in challenging conditions.

Whether you're looking to illuminate the facade of a building or create an atmospheric ambiance in your shower, **Wetty** is the perfect solution.

Thanks to its intuitive design and versatility, **Wetty** can be easily installed on both walls and ceilings, offering you a hassle-free installation solution. **Wetty** is available in three standard widths, but its true strength lies in the ability to customize lengths of up to 3 meters. Choose the size that fits your project and let **Wetty** seamlessly integrate into the architecture of the building or the surrounding environment. Its compact form and minimalist design adapt to any style, adding a touch of elegance to your space.


In addition to its water resistance, **Wetty** ensures excellent durability and optimal performance. Its high-quality materials withstand harsh weather conditions and climate changes, providing you with a reliable product that stands the test of time. **Wetty** also incorporates advanced technology to deliver uniform and pleasant lighting, creating captivating and welcoming atmospheres.




WETTY

SECTION 3"


LIGHT VIEW

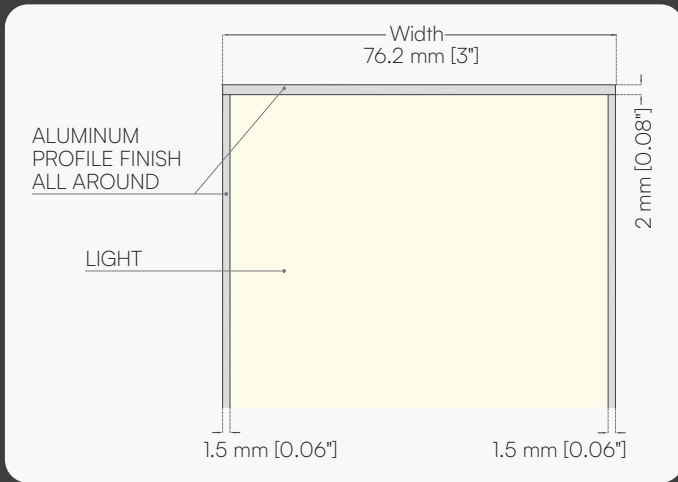

LIGHT VIEW BETWEEN THE PANELS

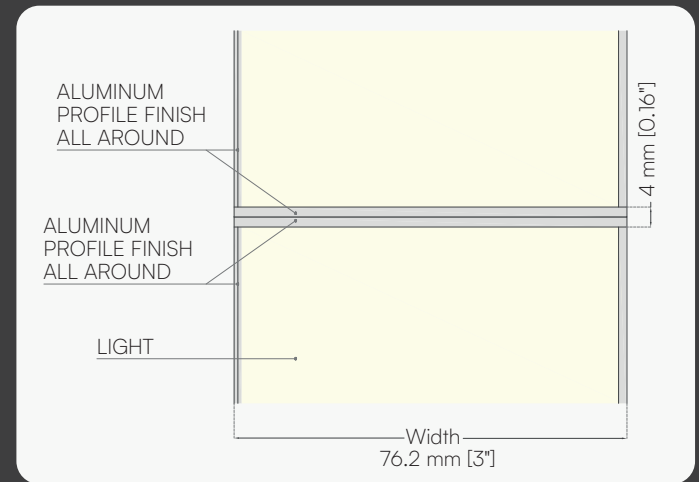


RECESSED MOUNTING

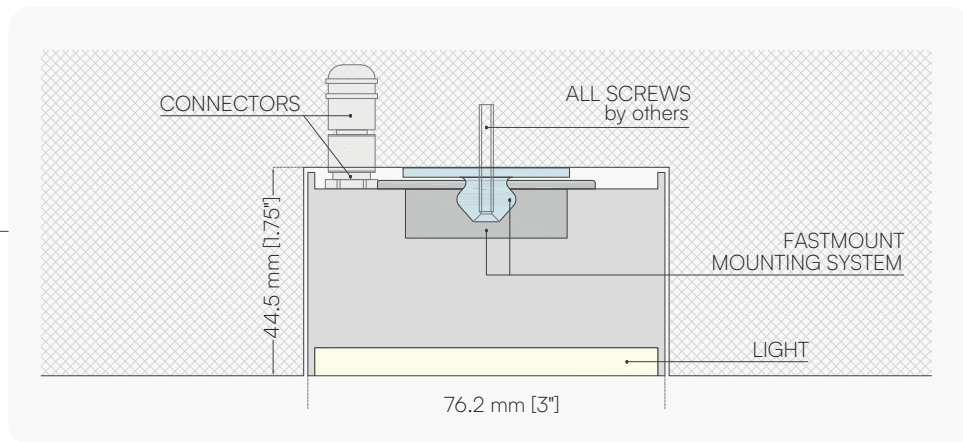

WETTY SECTION 3"


SURFACE MOUNTING

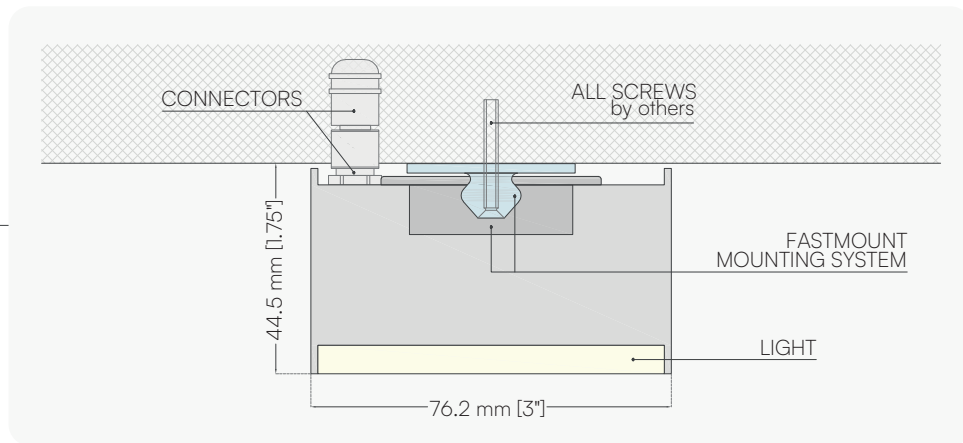


WETTY SECTION 3"

MALE
CONNECTOR

FEMALE
CONNECTOR

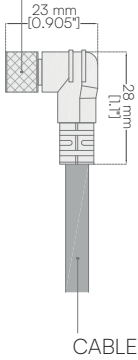


Long section

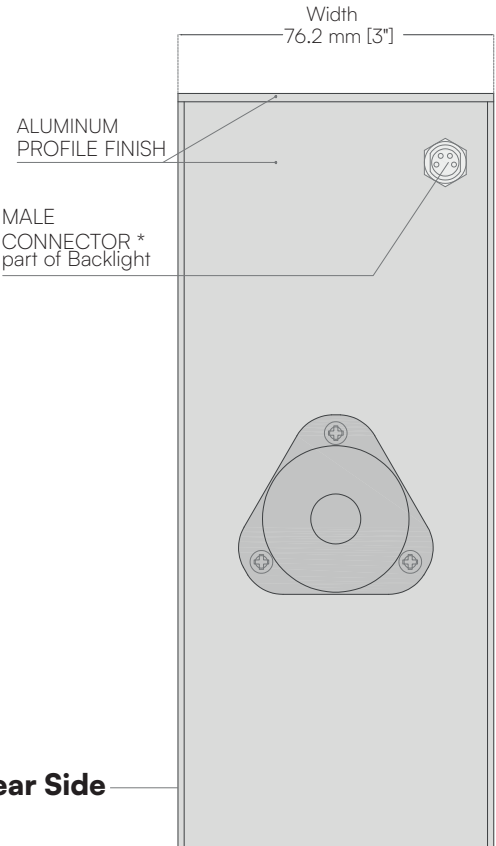

Technical Specs 3"

COLOR TEMPERATURE

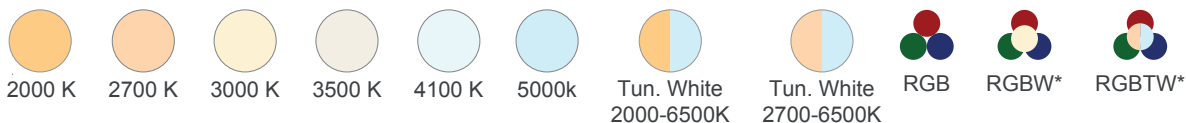

*Under request for a minimum order quantity to be define.

CRI

> 95

INPUT VOLTAGE

24VDC

DRIVER

AC DC 24V DC OUTPUT
(class 2 Power Unit)

DIMMABILITY

by all existing systems
(ELV/MLV, 0-10V, DALI, LUTRON, DMX ...)

LUMEN DELIVERED

Standard output 890 lm per linear mt (290 lm per linear ft)
High output 1780 lm per linear mt (580 lm per linear ft) of the longer side

POWER CONSUMPTION

Standard output 14 W per linear mt (4,5 W per linear ft)
High output 28 W per linear mt (9 W per linear ft)

IP | IK GRADE

IP65 for Wet Location | IK10

DIMENSIONS SHORT SIDE

MM 76.2
INCHES 3.0

DIMENSION LONG SIDE

MM 304.8 to 3048.0 mm
INCHES 12.0 to 120.0 in

LIFE TIME

70.000 hrs

WARRANTY

3 Years (36 month)

CERTIFICATIONS





LIGHT VIEW

WETTY


SECTION 4"

LIGHT VIEW

BETWEEN THE PANELS

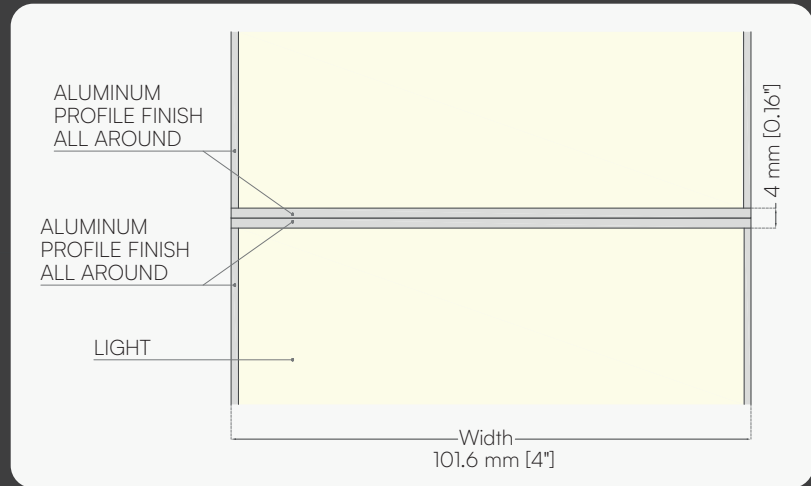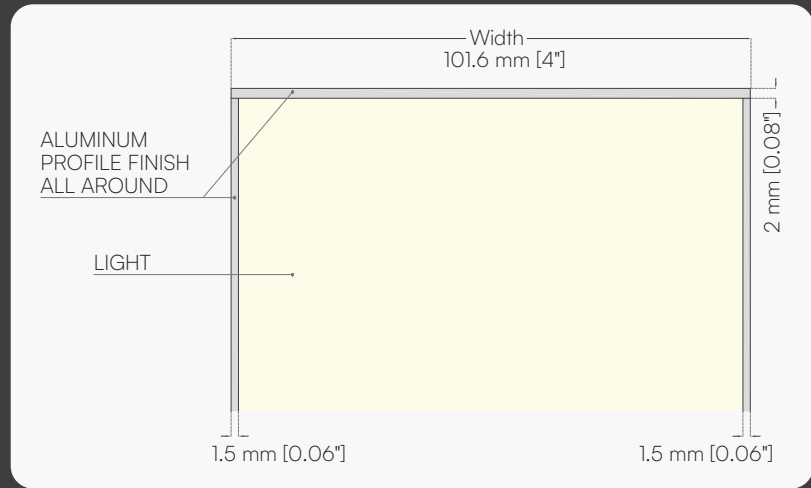


RECESSED MOUNTING


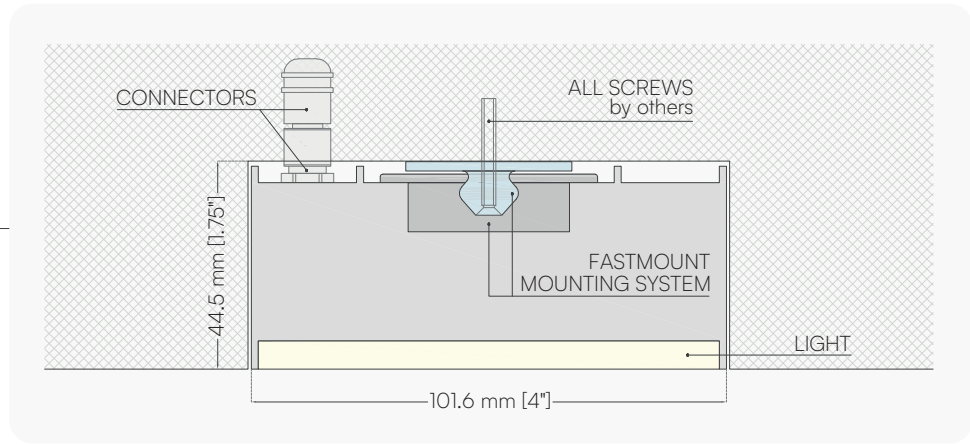


WETTY SECTION 4"

SURFACE MOUNTING

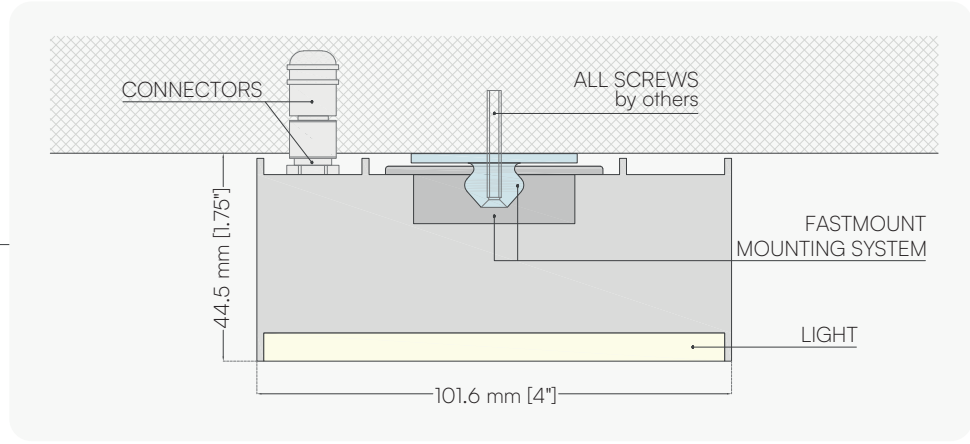

WETTY SECTION 4"

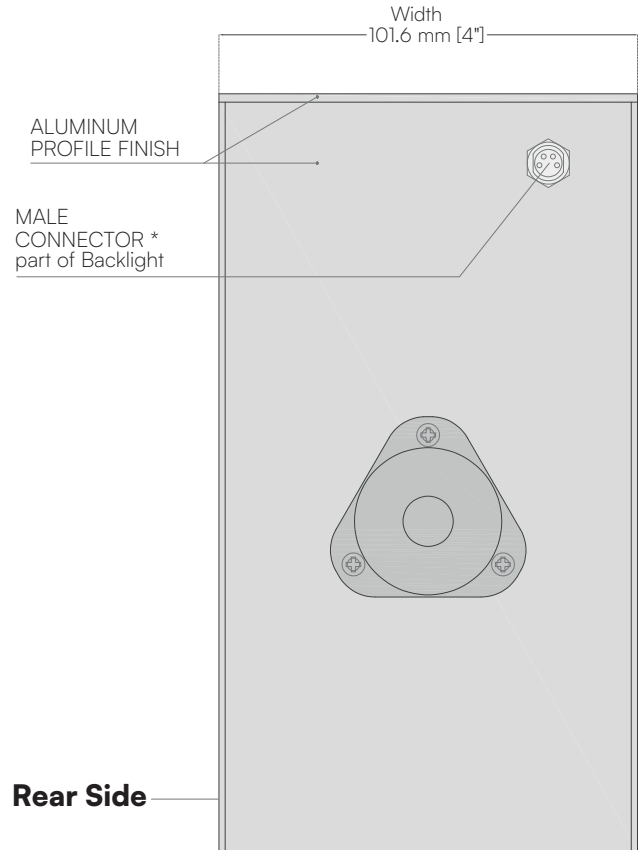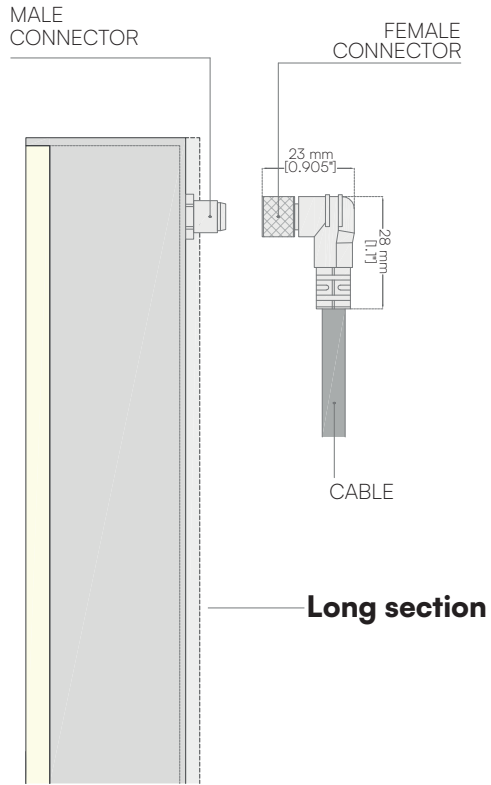

Technical Specs 4"

COLOR TEMPERATURE



*Under request for a minimum order quantity to be define.

CRI

> 95

INPUT VOLTAGE

24VDC

DRIVER

AC DC 24V DC OUTPUT
(class 2 Power Unit)

DIMMABILITY

by all existing systems
(ELV/MLV, 0-10V, DALI, LUTRON, DMX ...)

LUMEN DELIVERED

Standard output 890 lm per linear mt (290 lm per linear ft)
High output 1780 lm per linear mt (580 lm per linear ft) of the longer side

POWER CONSUMPTION

Standard output 14 W per linear mt (4,5 W per linear ft)
High output 28 W per linear mt (9 W per linear ft)

IP | IK GRADE

IP65 for Wet Location | IK10

DIMENSIONS SHORT SIDE

MM 101.6
INCHES 4.0

DIMENSION LONG SIDE

MM 304.8 to 3048.0 mm
INCHES 12.0 to 120.0 in

LIFE TIME

70.000 hrs


WARRANTY

3 Years (36 month)

CERTIFICATIONS




LIGHT VIEW

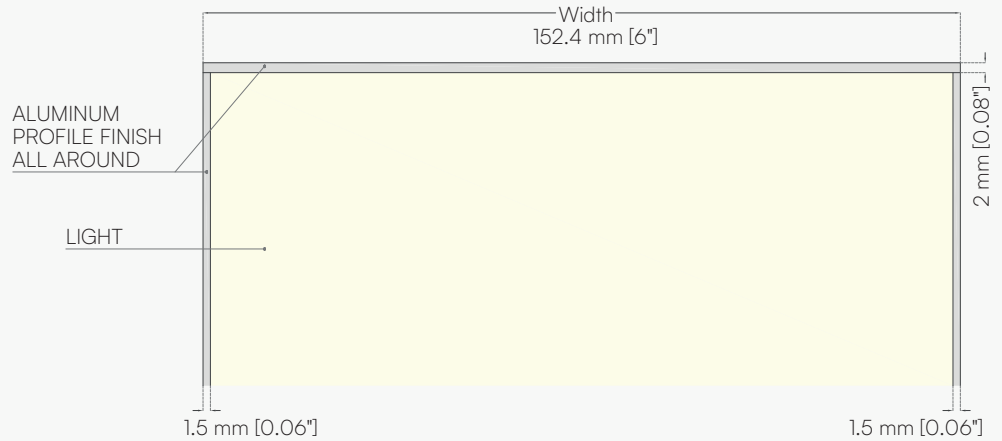


WETTY

SECTION 6"


LIGHT VIEW BETWEEN THE PANELS

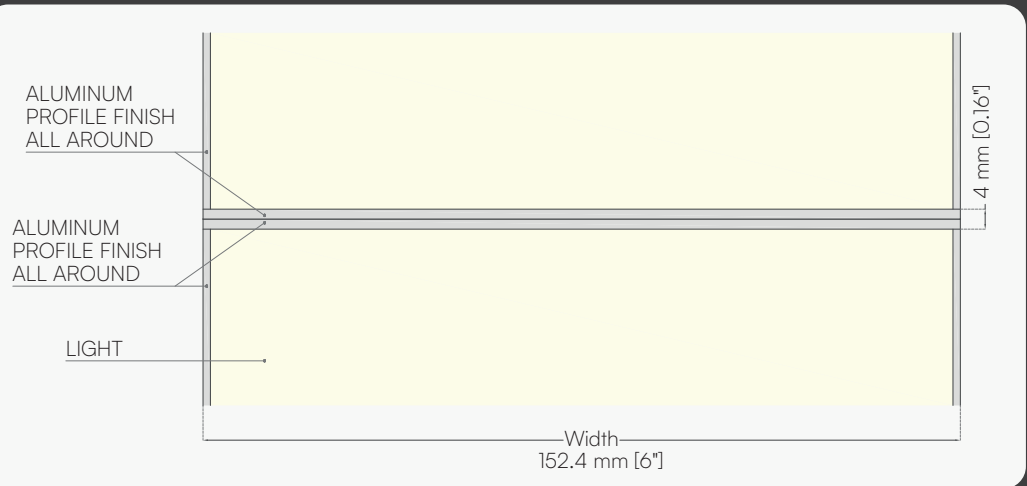

RECESSED MOUNTING

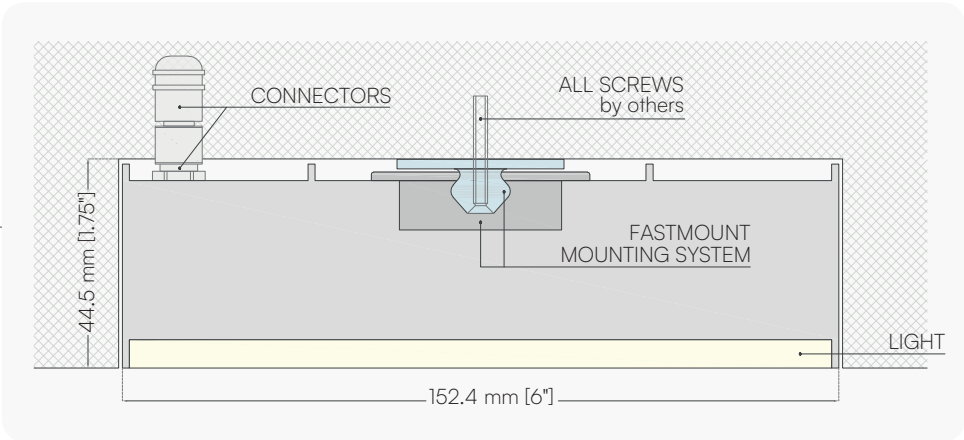


SURFACE MOUNTING

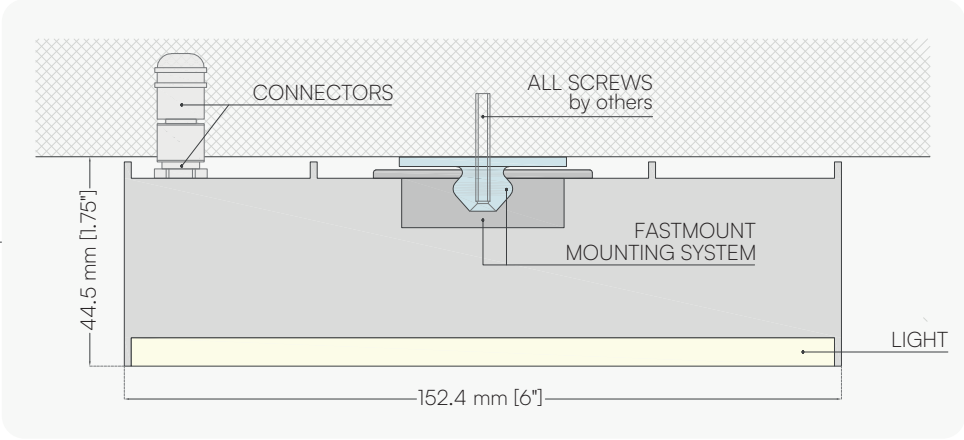

WETTY SECTION 6"

MALE
CONNECTOR

FEMALE
CONNECTOR

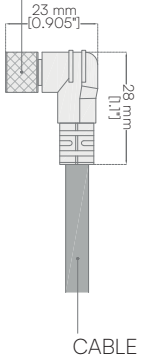


Long section

ALUMINUM
PROFILE FINISH

MALE
CONNECTOR *
part of Backlight

Width
152.4 mm [6"]

Rear Side



Technical Specs 6"

COLOR TEMPERATURE



*Under request for a minimum order quantity to be define.

CRI

> 95

INPUT VOLTAGE

24VDC

DRIVER

AC DC 24V DC OUTPUT
(class 2 Power Unit)

DIMMABILITY

by all existing systems
(ELV/MLV, 0-10V, DALI, LUTRON, DMX ...)

LUMEN DELIVERED

Standard output 890 lm per linear mt (290 lm per linear ft)
High output 1780 lm per linear mt (580 lm per linear ft) of the longer side

POWER CONSUMPTION

Standard output 14 W per linear mt (4,5 W per linear ft)
High output 28 W per linear mt (9 W per linear ft)

IP | IK GRADE

IP65 for Wet Location | IK10

DIMENSIONS SHORT SIDE

MM 152.4
INCHES 6.0

DIMENSION LONG SIDE

MM 304.8 to 3048.0 mm
INCHES 12.0 to 120.0 in

LIFE TIME

70.000 hrs

WARRANTY

3 Years (36 month)

CERTIFICATIONS





















Salvatore Ferragamo



*Discover all our most famous products
that have made and still make lighting history.*

MAGIC CLOUD Custom Uniform Lighting Panels

FLUSH Custom Uniform Lighting Bars

HALO Custom uniform Lighting Frames in a single piece

HIDE Line of Uniform Lighting Circles

PILL Plasterboard built-in Square and Round Lights

WETTY WET / IP65 Line

CHIARO Lighting Integration for ARMSTRONG CEILINGS

STAMP Creative light on plasterboard



www.backlightsrl.com

BACKLIGHT

Via Alessandro Volta, 5
20876 Ornago (MB)
Italy

+39 039 6010396
www.backlightsrl.com
info@backlightsrl.com

f @ in ▶ | BACKLIGHTSRL